

FCC Compliance and Advisory Statement

Federal Communications Commission (FCC) Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installations. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient / Relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that the receiver is connected.
4. Consult the dealer or an experienced radio / TV technician for help.

CAUTION:

Change or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

Installing the Batteries

Wireless Keyboard use two AA alkaline batteries, Wireless mouse use two AAA Ni-MH rechargeable batteries.

Installing Batteries in the Mouse

Step 1. Open the battery compartment

Step 2. Insert the batteries as shown inside the battery compartment.

Step 3. Replace the cover.




Install the batteries in the keyboard

Step 1. Remove the battery compartment cover on the bottom of the keyboard by squeezing the cover in from the tab to release it.

Step 2. Insert the batteries as shown inside the battery compartment.

Step 3. Replace the cover.



Connecting the Receiver

USB + PS/2 Version


The receiver is connected to your computer via a 1.5 meter USB + PS/2 dual Plug cable. And it plugs into your computer's USB port or PS/2 Port.



USB Port



PS/2 Port

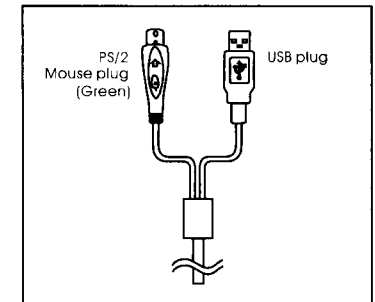


For USB port installation

1. Connect the USB plug ONLY to USB port of the computer.


For PS/2 mode installation

CAUTION: Before installing the receiver's cable. Turn off your computer. Plugging and unplugging cables to your computer's mouse port while the computer is running can damage the mouse port or your computer.

1. Make sure that your computer is turned off.
2. Connect the USB to PS/2 Adaptor to USB plug. Then connect the adaptor to PS/2 Keyboard port (in purple color)
3. Connect another green PS/2 plug to PS/2 Mouse port (in green color)

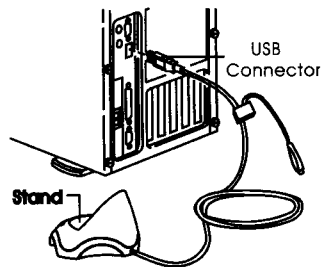

USB Mode installation

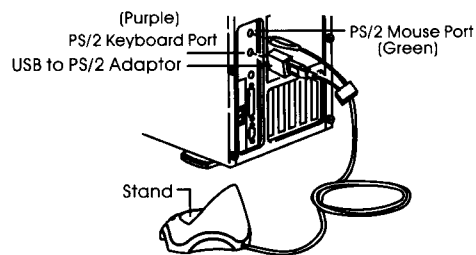


Dual PS/2 Mode installation

USB version

The receiver is connected to your computer via a 1.5 meter USB cable, and it plug to USB port of your computer.



USB Port

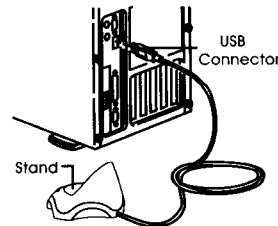

USB port installation

1. Connect the USB plug to USB port of your computer.


CAUTION:

Windows 98 or higher or Macintosh OS 8.6 or higher is required for USB port installation. Connect the receiver cable to the USB port on computer. For Windows, you may be prompted to insert the Windows software CD. Insert this software CD into the computer's CD-ROM driver when asked to do so. Then follow the on-screen instructions.

Indicators on Receiver

There is two indicator on the Receiver.



1. Connect: the Indicator will flash when you press the connect button. When the receiver successful change the IDs, the indicator will flash several fast.
2. Charging: the indicator will light on when charging the battery in mouse, the indicator will turn off when the battery is full.



Changing the channel and security ID

Your mouse and keyboard come with 2 Channel and multi security ID. Which can let your receiver listen to one mouse and one keyboard. Do following step to change channel and security ID when you get undesired interference from another device used nearby..

1. Press the connect button on the bottom of the keyboard.
2. Press the connect button on front of the receiver.
3. Press the connect button on the bottom of the mouse.



NOTE:

1. The Indicating LED will light steadily when the synchronization linkage is completed.
2. You need to do above steps to re-connect the mouse and keyboard each time you replace battery.
3. Your Keyboard and mouse may have only one channel due to different product version.

Charge the Battery in Mouse

Your mouse uses two AAA size Ni-MH rechargeable batteries. Before you use the mouse, you need to place the mouse on the stand to charge the batteries for 15 hours. This is very important to battery life. Please make sure the charge indicator is light ON when you charge the mouse.

When you feel your wireless mouse is not working smoothly, that means that the batteries need to be recharged. Please put the mouse on the stand for charging. Normally it will take 12 hours to get the batteries fully charged.

USB charge Version


1. place the mouse on the stand and make sure the charging indicator is light ON.

CAUTION: Some computer will turn off the power of USB port when entering sleep mode. In this case, the battery inside the mouse can not be charged. So you are requested to keep your computer always ON When you charge the mouse

Adaptor Charge Version

Charge the battery in Mouse


1. Connect the AC-DC Adaptor to AC230V Power outlet.
2. Connect the Charge plug to the Receiver.
2. Place the Mouse on the Stand.

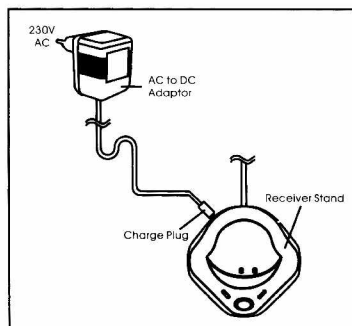

Hotkeys on the keyboard

The keyboard have 21 hotkeys.

Internet Hotkeys



Internet hotkeys are programmable



Multimedia Hotkeys



PC Hotkeys



Scroll panel



Software Installation

The driver supports Win95, Win98, Win 98/SE, Win 2000 and Win XP.

The driver will install automatically if the auto-run is enable in your computer, otherwise, you can manually launch the installation by double clicking the file setup.exe in the CD-ROM.

The setup applet's icon of the keyboard and the mouse will appear on the windows taskbar after successfully completing software installation.



Mouse setup applet

Keyboard setup applet

You can double click or right click the applet, and setup the functions of your preferred selection for both keyboard and mouse to enhance your device

Scroll, Caps, Num Lock status

The scroll, Caps, Num lock status are shown on the taskbar (Win 2K and Win xp) or above the taskbar (win 98, win ME)

